

10 Functions :

- 4/5/T25 mm with 5Nm torque alert function.
- 2/3/8/6mm L-shaped / flat head screwdriver/ cross head screwdriver/ chain rivet extractor.

Specifications :

- Preset to 5Nm.
- No calibration or maintenance needed
- Rated to 10000 clicks
- IPX4 weather resistance


How to 



Instructions of Use:

- Pull out the desired tool (5mm, 4mm or T25) until it is fully extended.
The body of the tool is designed to limit the extent to which each bit can be extended for the ultimate accuracy of the torque function.
- Turn the chosen bolt until you feel the bolt tightening and offering resistance.
- According to Figure 1, place your thumb on Point A and your index finger on Point B.

Figure 1

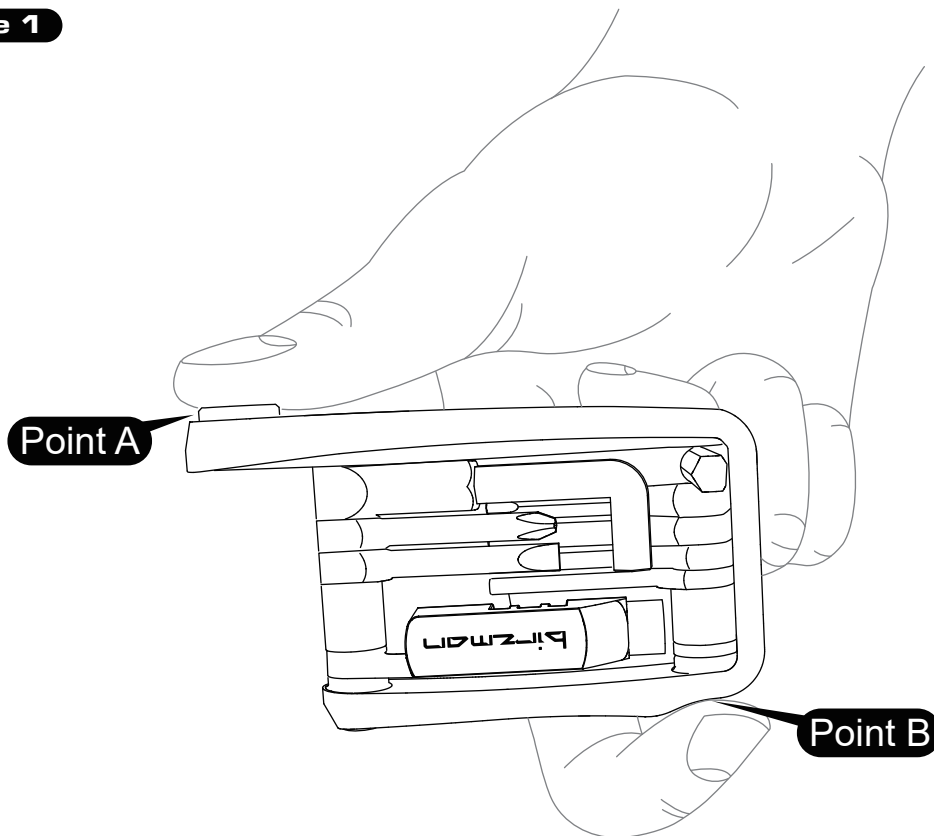

- The other fingers should not be in contact with the tool as this may affect accuracy.
- Continue to tighten the bolt until the torque button clicks, indicating 5Nm of torque has been reached.

Note :

- The torque feature is for the purpose of precautionary measure only. The degree of accuracy may be subject to variances including personal use and/or parts serviced.
- For the proper maintenance of your tools, please apply a rust preventive oil regularly.
- All tools should be stored in a dry environment.